




# Double Flap Valve

## Salient Features


**Sizes available :** SQ250, SQ400 and SQ450  
(Sizes available upon request.)

**Materials of construction :** mild steel, cast aluminum, stainless steel


**Actuation :** manual, motorized, pneumatic  
Round and square inlet and outlets available  
Robust design for continual operation

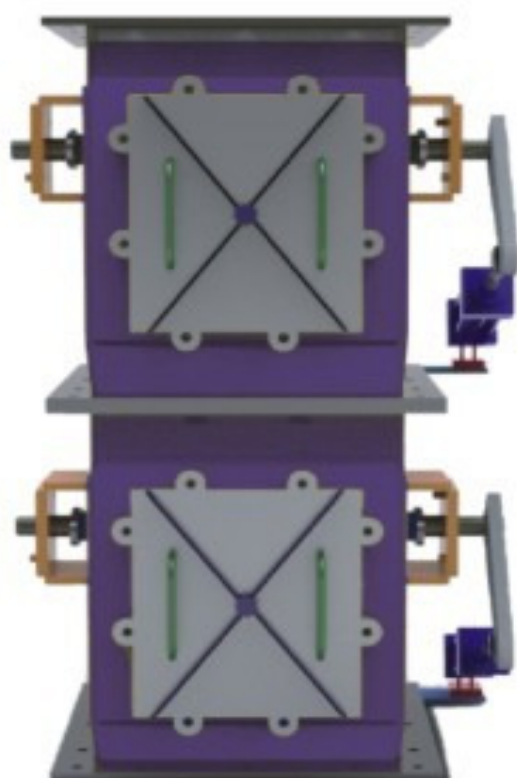

**UNICON** provides three types of double Flap valves as mechanically operated valves, electrically operated valves and pneumatically operated valves. In the case of pneumatically operated double cone valves, pneumatically operated piston gives the force for the movement of the flaps.

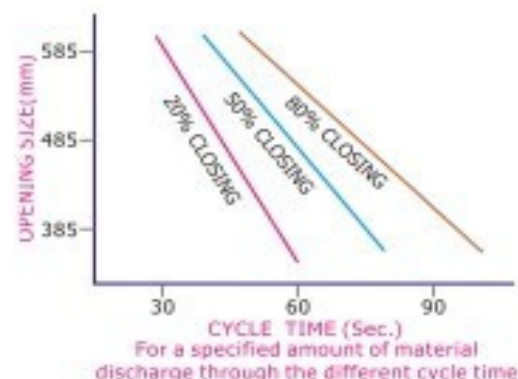

**UNICON** double Flap valves are designed specifically for long life in handling. The wide selection of available actuators and control component allow easy integration with any degree of automation. A choice of mild steel, 400 hardox, 500 hardox & stainless steel materials gives the option of selection material of construction to suit your particular needs. Double Flap valves are very durable.

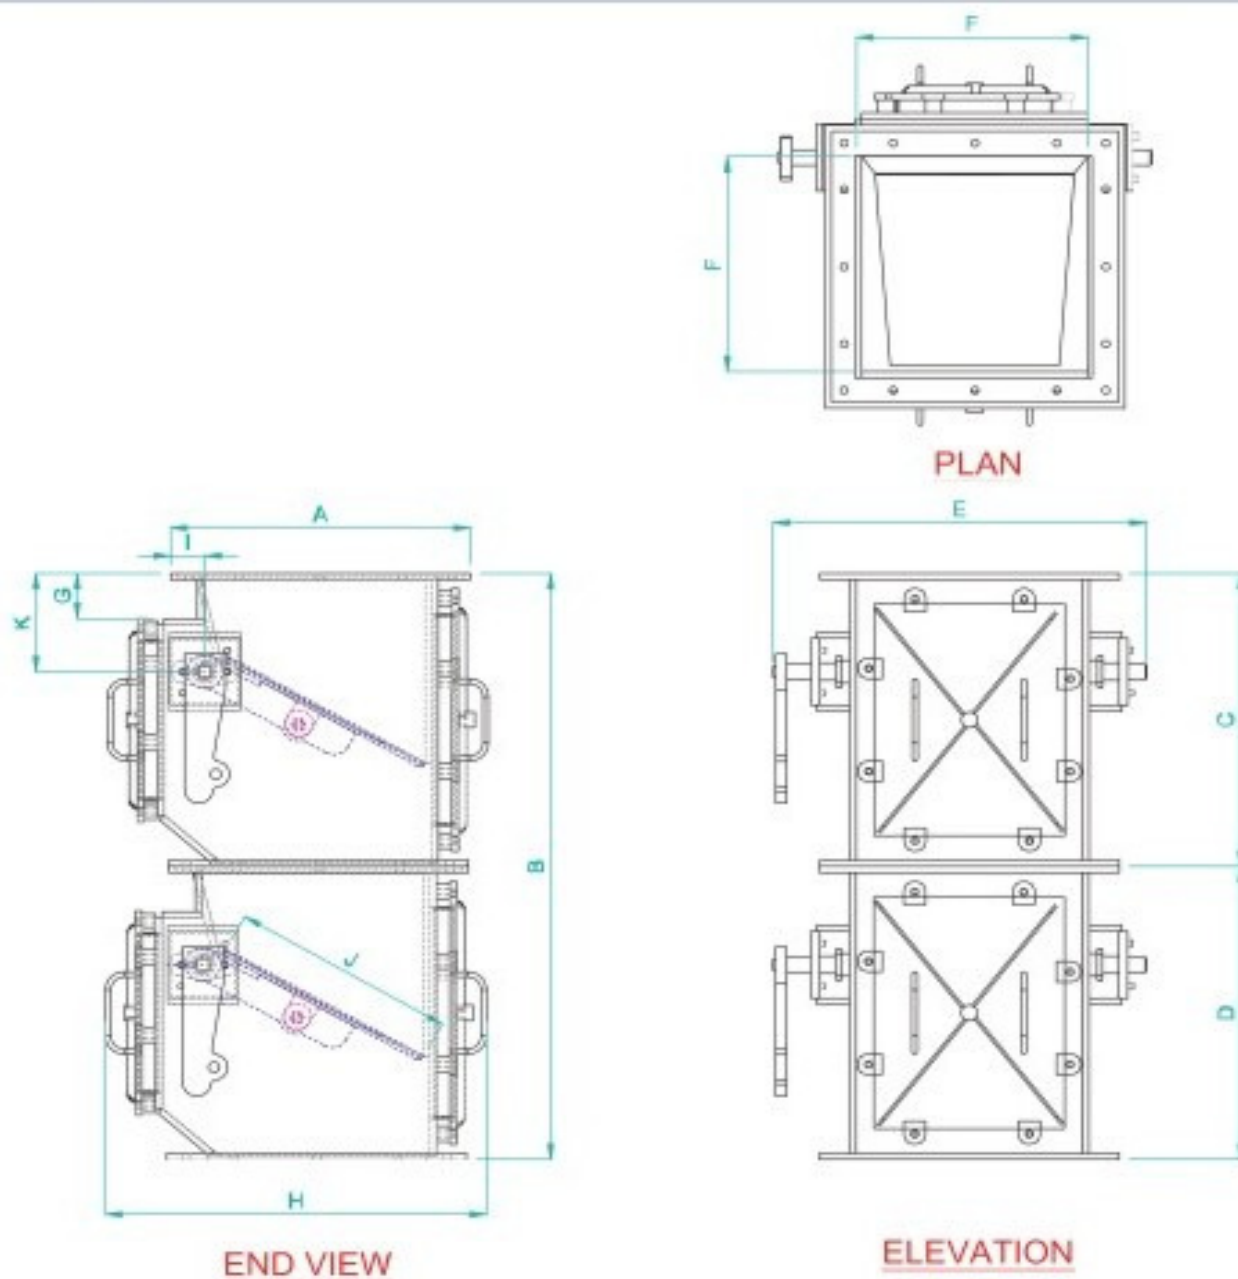

TYPE	A	B	C	D	E	F	G	H	I	J	K
250x250	345	720	560	360	450	250	50	450	30	225	115
400x400	550	1152	575	575	720	400	75	716	45	540	180
450x450	620	1300	650	650	810	450	85	810	50	405	200

Note : Dimensions and other details given in this catalogue are subject to change without notice, due to continuous product improvement.